


Laundry Tub

sku : 303491
code : LT-350-DO

- Laundry tub, one door
- All pressure mixer
- S/Steel bowl
- Metal cabinet
- Bar handle
- Pipe work
- Magnetic catches
- Adjustable legs
- White melteca shelf

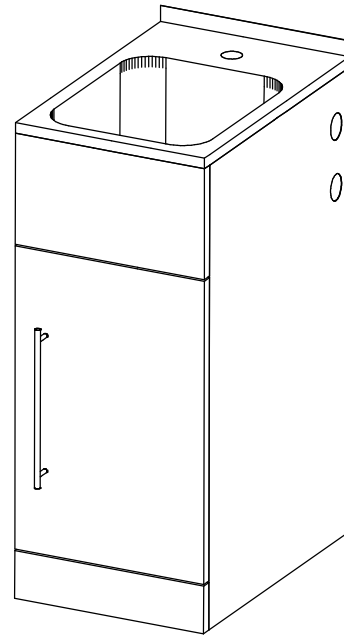

Warranty

- A 5 year limited warranty on laundry tub includes tapware and accessories is offered.
- This warranty is limited to the repair or replacement, at our option, within the warranty period.
- The guarantee is non-transferable and proof of purchase is required.
- Tapware should only be cleaned with a mild detergent and a soft damp cloth. Failure to use an in-line strainer or filter on lines to tapware incorporating a ceramic cartridge or ceramic disc mechanism may also void the warranty.
- This warranty will not cover any damage caused by exposing the product to acidic or corrosive materials or chemicals such as dyes, solvents or using abrasive cleaners of any kind.
- Variations with the colour or gloss within the product or any ageing or fading of colour, shine or gloss level over time are not covered by this warranty.
- Costs incurred on installation, removal or any reinstallation, or any associated costs, are not covered by this warranty.

Important note

- Sanitary plumbing shall only be carried out by a Registered Plumber. All plumbing work must be done in accordance with local and national building and plumbing codes as applicable. All electrical work must be done in accordance with local and national electrical codes as applicable.

Preparation

- Unpack and inspect the laundry tub for any shipping damages.
- The warranty does not cover visual imperfections or blemishes in the surface and edges of the tub that were not brought to our attention at the time you inspected the tub.
- The tub must be installed level to ensure door line up correctly. If the tub is out of level, the door may catch the cabinet when open. Adjust feet to correct any misalignment.

Laundry Tub

sku : 303491
code : LT-350-DO


All Pressure Mixer

Equal or unequal pressure

- Minimum : 35 kPa
- Recommended : 150 kPa
- Never to Exceed : 500 kPa
- Max operating temp : 65 °C

3 Way Ball Valve

- Connect the hot and cold 3 way ball valve from the installation kit to the mains wingbacks
- Make sure the washing machine cap is secure and will not leak.
- All pipe work and valves must be checked for water tightness. We recommend the use of thread tape on all brass connections including the ball valves connections.

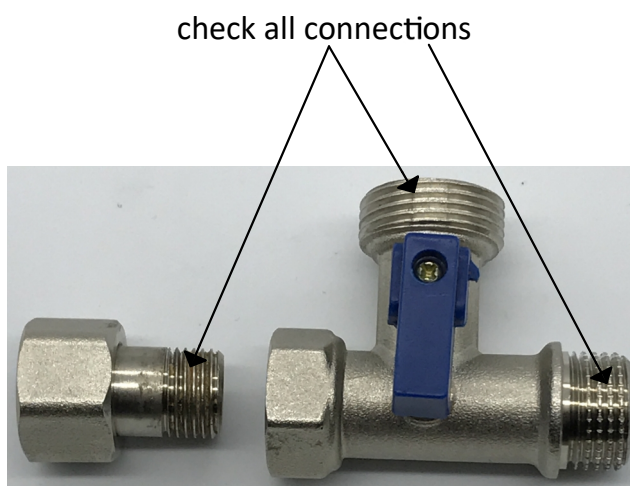

Pipe Work

- Please check THOROUGHLY all connections on pipework.
- All these connections are only hand tightened and the purpose is only to show you where they would normally be connected.
- make changes if necessary

Reversing the door

- the door of this tub is NOT able to reverse to other direction .